





CV700A / CV702A Series

Back Panel (CV700A)

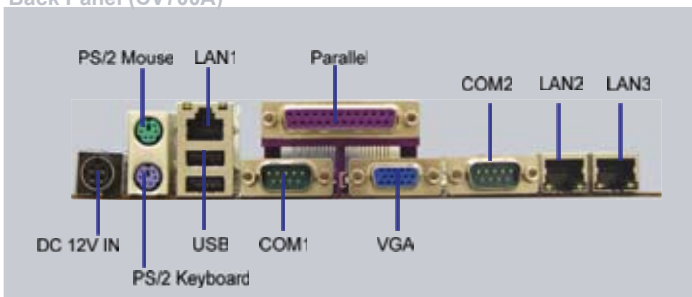

Back Panel (CV702A)

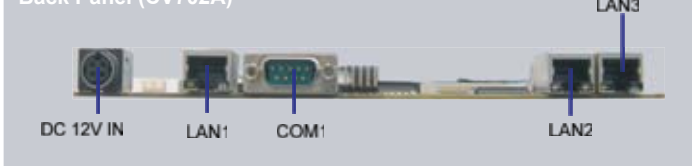


Application Network Appliances for Firewall, VPN, Server and Access Controller for Wire/Wireless LAN.

Features VIA V4 bus processor Eden/C7
On board 3 LAN
SATA
Mini PCI

Specifications

- . CPU type VIA Eden(V4)/ C7 nano BGA2 400 pin, L1/L2 128K on die
- . Front Side Bus 400/533 MHz
- . MB Chipset VIA CN700 + VIA VT8237R Plus
- . Graphics Integrated with VIA CN700
Shared system memory up to 64MB
MPEG-2 hardware VLD
Resolution up to 1600 x 1200
- . TV-Out(Optional) NTSC(M, J) or PAL(B,D,G,H,I,M,N,Nc)
- . Memory 1 x DDR II SDRAM 533/400 (max. 1GB)
- . IDE Ultra DMA-133/100/66 transfer protocols
1 x 40 pin 2.54mm, 1 x 44 pin 2.0mm
Support Compact Flash card type II for ATA interface
- . Audio AC-Link for Audio CODEC, AC'97 2.1
- . LAN 3 x Realtek 10/100 Mbps (optional Realtek/Intel Gigabit)
- . IO function 2 x RS232
Supports Hardware Monitor Controller
Supports Infrared SIR and FIR
Supports one printer port
- . USB 6 x USB 2.0
- . SATA One channel connector
SATA drive transfer rate is capable of up to 150MB/s
- . Expand interface 1 x Mini PCI for only PCI rev: 2.2 interface
- . Power On board DC +12V convert to +3.3V/+12V/+5V for system
- . Dimension 200 x 150 mm

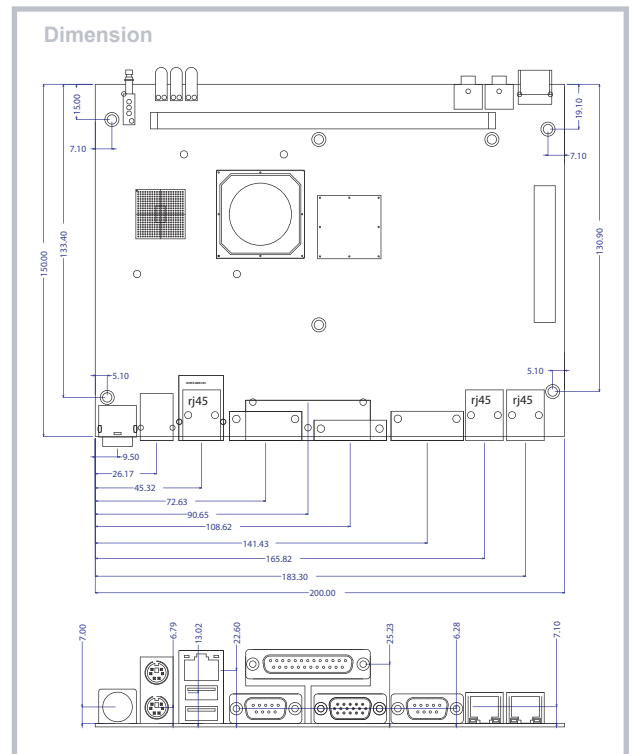

Testing environment

Model name : CV700A3R10C
CPU : VIA V4 C7 1000MHz
Chipset : VIA CN700 & VIA VT8237R PLUS
OS : WIN XP
Testing Program : 3D Mark 2001 SE

Fanless solution with CF card

| Chassis | Light | Neo | Twister |
|-------------|-------|------|---------|
| Temperature | | | |
| 0°C | Pass | Pass | Pass |
| 25°C | Pass | Pass | Pass |
| 40°C | Pass | Pass | Pass |
| 60°C | FAN | Pass | Pass |

Fanless solution with 2.5" HDD

| Chassis | Light | Neo | Twister |
|-------------|-------|------|---------|
| Temperature | | | |
| 0°C | Pass | Pass | Pass |
| 25°C | Pass | Pass | Pass |
| 40°C | FAN | Pass | Pass |
| 60°C | FAN | Pass | Pass |

- . Operation Temperature : 0 ~ 60°C
- . Operation Humidity : 5~95% @ 60°C, non-condensing

Ordering Information

- . CV700A/702A-3R50E 3 LAN, 500MHz, VIA Eden(V4) processor
- . CV700A/702A-3R10C 3 LAN, 1GHz, VIA C7 processor